


# E400AJPn Electric Boom Lift



## APPLICATIONS

- Facilities maintenance
- Shopping centres and other indoor/outdoor areas
- Manufacturing and warehouse applications and stock-takes
- Electricians
- Plumbers
- Window installers
- All maintenance and construction work

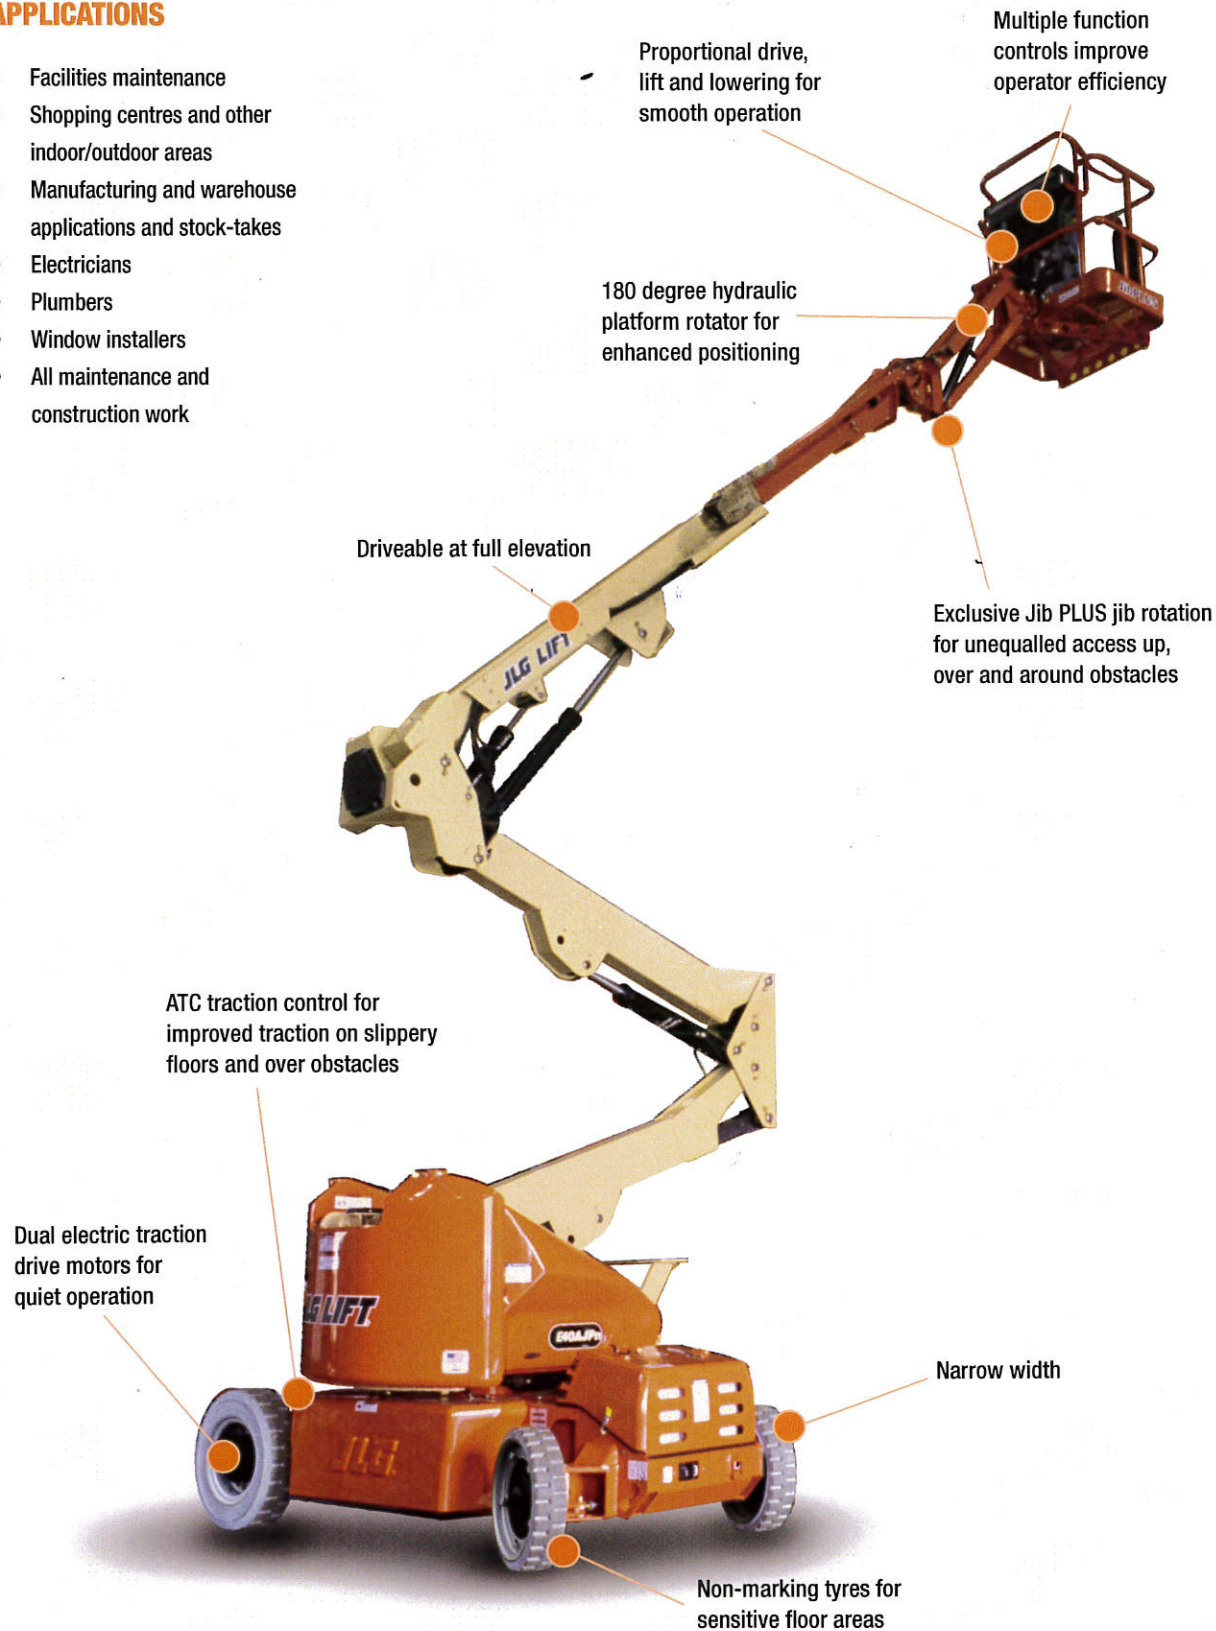

# E400AJPn Electric Boom Lift




## QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What is the working height needed for the job?
- What is the up and over reach required for the job?
- Do you need an extension lead outlet in the platform?
- Do you need non-marking tyres?
- Do you have 240V AC power on site?

## KEY SELLING POINTS

- Smooth control, proportional electric drive, with two speed ranges
- Proportional lift and swing controls at the platform
- Jib boom and basket rotate
- Jib PLUS feature allows jib boom to rotate either side of centre
- Cylinder boots protect cylinder rods from overspray and contaminants
- Non-marking solid tyres
- Multi axis 4 degree level sensor
- Plug in JLG analyser at platform and base to indicate system functions for servicing and adjustment
- Narrow width chassis for tight areas

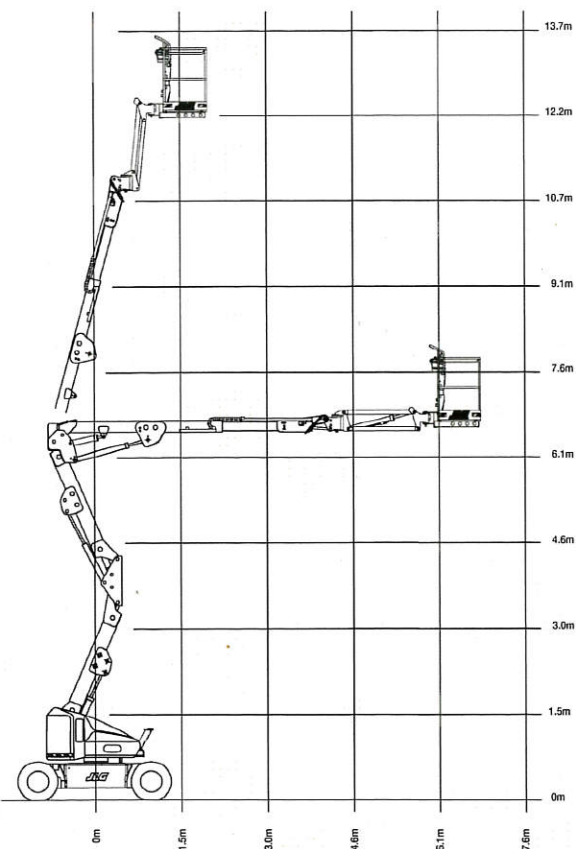

## SPECIFICATIONS

### Performance:

Platform Height (max.)	12.19m
Working Height	14.19m
Platform Rotation Angle	180°
Jib Rotation Angle	180°
Jib Raise Angle	86°
Jib Lower Angle	55°
Jib Articulation Range	141°
Maximum Horizontal Outreach	6.83m
Platform Capacity	230kg
Slewing Angle	360°
Continuous Slew	No

### Dimensions:

Stowed Length	6.71m
Stowed Height	1.97m
Overall Width	1.50m
Wheelbase	2.01m
Ground Clearance	0.13m
Platform Width	1.22m
Platform Length	0.76m
Overall Jib Length	1.24m
Tailswing	0.13m

### Power:

Power Source	Electric DC
DC Voltage	48V
DC Power	370 Amp h

### Travel:

Tyre Size	25 x 7 x 12
Tyre Type	Solid
Inside Turn Radius	0.86m
Outside Turn Radius	3.15m
Gradeability	30%

### Weights and Capabilities:

Hydraulic Tank Capacity	15 Ltr
Operating Weight	6,759kg